



MVF/MVP PANELS


Chief® **MVF (Mechanically Seamed Vertical Leg Flat)** and **MVP (Mechanically Seamed Vertical Leg Pencil-Rib)** roof panels deliver exceptional lift capacity, performance, and ease of installation. Crafted from 24-gauge, 50ksi steel, these mechanically seamed panels are ideal for buildings where architectural appearance is essential, such as retail stores, dealerships, offices, churches, and schools.

Both panel styles include striations to reduce the effects of oil canning, with the **MVP panel** incorporating pencil ribs for added visual interest. These versatile panels can be installed directly without a structural underlayment but are compatible with one if desired.

Blending strength, functionality, and a refined aesthetic, the **MVF** and **MVP panels** continue to set a high standard for industry performance.




MVF

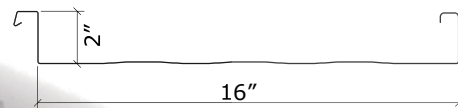

Note: Dimensions are nominal.

MVP

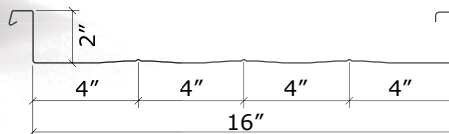

MVF/MVP PANELS

Specifications and Color Options



1821 S. North Road | PO Box 2078
Grand Island, NE 68802-2078

Emerald Green (EG)
PVDF SRI: 30

Galvalume (GM)
SRI: 62

Royale Blue (RB)
PVDF SRI: 29

Polar White (PW)
PVDF SRI: 81

Cherokee (CK)
FEVE SRI: 41

Parchment (PA)
PVDF SRI: 73

Carbon (CB)
FEVE SRI: 28

Ash Gray (AG)
PVDF SRI: 53

Charcoal Gray (CG)
PVDF SRI: 35

Fieldstone (FS)
PVDF SRI: 48

Antique Bronze (AQ)
PVDF SRI: 33

Sierra Madre (SM)
PVDF SRI: 63

**35
YEAR**

LIMITED
FINISH
WARRANTY

PVDF - POLYVINYLIDENE FLUORIDE

Chief's PVDF finish is made with polyvinylidene fluoride resin, where a minimum of 70% of the resin is PVDF. The result is a proven ability to resist ultraviolet radiation in sunlight for maximum protection against general weathering effects, chalking, and fading.

**35
YEAR**

LIMITED
FINISH
WARRANTY

FEVE - FLUOROETHYLENE VINYL ETHER

Chief's FEVE finish is a fluoropolymer resin-based coating similar to PVDF but formulated for bright, fade-prone colors.

**20
YEAR**

LIMITED
FINISH
WARRANTY

GM - ACRYLIC COATED GALVALUME®

Chief's exterior roof, wall and trim material is available in an industry standard ASTM A792 Acrylic Coated Galvalume® finish. Galvalume® is a unique coating of 55% aluminum and 45% zinc that resists corrosion. The Galvalume® sheet is coated with a thin, clear acrylic coating applied to both sides.

Since all color applications are affected by age, lighting conditions, heat, digital screen settings, and mechanical coating or printing processes, the color represented on this page may vary in color or finish from the actual product. DO NOT MAKE YOUR FINAL COLOR DECISION BASED ON PRINTED MATERIALS ALONE. SELECTIONS ARE BEST MADE FROM ACTUAL PANEL SAMPLES.